



RADICI PIETRO INDUSTRIES & BRANDS S.p.A.

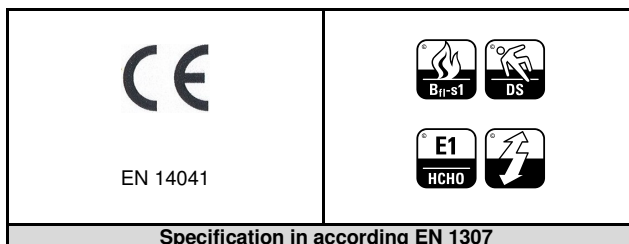

EXCALIBUR



Specification in according EN 1307

Costruzione	Technique de fabrication	Construction	Herstellungsverfahren
Tufting riccio 5/32"	Tufted bouclé 5/32"	Tufted loop pile 5/32"	Getufted Schlinge 5/32"
Composizione	Composition du velours	Pile composition	Polnutschicht
100% poliammide 6.6	100% polyamide 6.6	100% polyamid 6.6	100% polyamid 6.6
Sottofondo	Dossier	Secondary backing	Rückenausüstung
Juta sintetica	Jute synthétique	Synthetic jute	SDR Textilrucken
Punti al m²	Touffes au m²	Stitches per m²	Knoten m²
± 95000	± 95000	± 95000	± 95000
Altezza pelo	Hauteur du velours	Pile height	Polhöhe
± 3.6 mm	± 3.6 mm	± 3.6 mm	± 3.6 mm
Altezza totale	Hauteur totale	Total height	Gesamtdicke
± 6.5 mm	± 6.5 mm	± 6.5 mm	± 6.5 mm
Peso della fibra	Poids du velours	Yarn weight	Polgewicht
± 1000 g/m ²	± 1000 g/m ²	± 1000 g/m ²	± 1000 g/m ²
Peso totale	Poids total	Total weight	Gesamtgewicht
± 1950 g/m ²	± 1950 g/m ²	± 1950 g/m ²	± 1950 g/m ²
Larghezza rotolo	Largeur du rouleau	Roll width	Breite
400 cm	400 cm	400 cm	400 cm
Famiglia Tufting 3	Famiglia Tufting 3	Famiglia Tufting 3	Famiglia Tufting 3



Colour fastness to light	≥ 5 (4 pastel shade)	Thermal resistance m ² K/W	≤ 0,17
Insulation impact noise ΔLw	24 dB	Body voltage walking test kV	≤ 2
Acoustical absorption α _w	0,15		

RESISTENZA – WEARABILITY RESISTANCE - STRAPAZIERWERT				COMFORT – COMFORT CONFORT - KOMFORTWERT			
estrema	elevata	normale	sufficiente	medio	buono	alto	ottimo
extreme	high	good	normal	medium	good	very good	excellent
extrême	élevée	normale	suffisante	moyen	bon	élévé	excellent
extrem	stark	normal	gering	einfach	gut	hoch	luxuriös

Approved by Technique Management: M. Medica

Date: 29/08/2012